
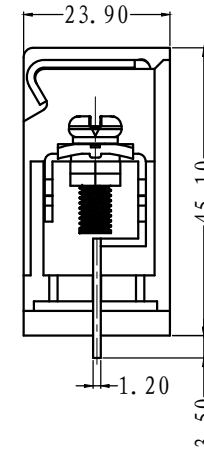
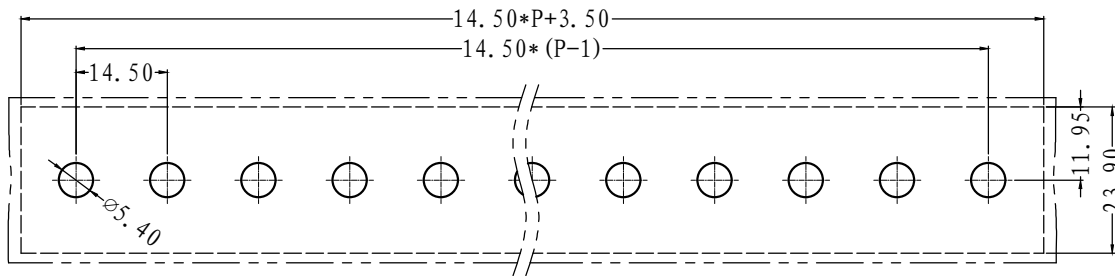
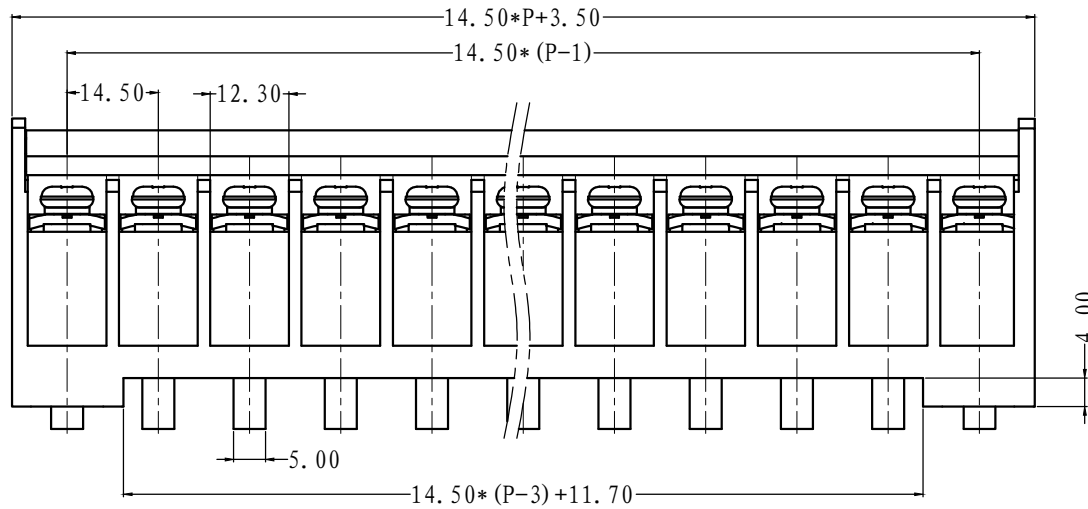


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

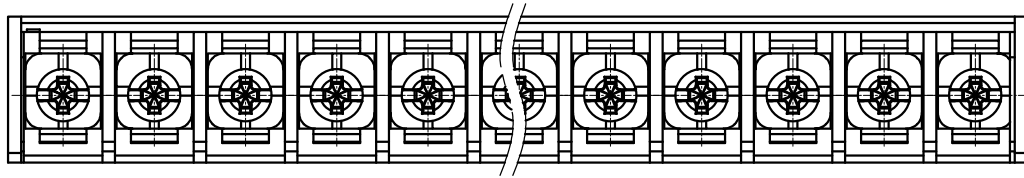

NOTES:

Pitch : 14.5mm
 Rated Voltage : 600V
 Rated Current : 40 A
 Withstand Voltage :
 AC3000V for 1 minute
 Insulation Resistance :
 1000MΩ / DC1000V
 Using Temperature Range :
 - 40°C ~ + 130°C
 Screw Torque Value : 2.0Nm

技术要求:

间距: 14.5mm
 额定电压: 600V
 额定电流: 40A
 耐电压值: AC3000V/min
 绝缘阻抗: 1000MΩ/DC1000V
 使用条件: -40°C~+130°C
 螺丝扭矩: 2.0Nm

	pitch dimension			Nominal dimension					— □ ○
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	外六角螺母	SM00A500001V	1	铁	镀锌
3	GB1450-螺丝	SPFFA808093V	P	碳钢	镀锌
2	GB1450-焊脚	2526B0001AV	P	黄铜	镀雾锡
1	GB1450-14.5-XXP-主体	2526A30XXAV	1	PBT	黑色
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	WL	DATE	18-09-28	UNITS	MM
CHK.	DATE	SIZE	A4	THIRD ANGLE PROJECTION	
APP.	DATE	SCALE	1:1	DWG NO.	SP-1-DB1450
上海有乐电气有限公司 Shanghai YouLe Electric Co., LTD				TITLE	GB1450-14.5-XXP-1Y-00A GB1450-14.5-成品
				SHEET	1 of 1
				REV: V0	