
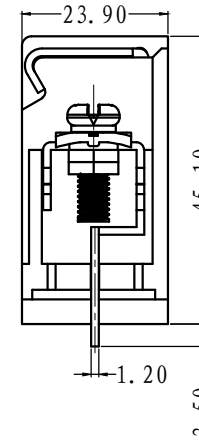
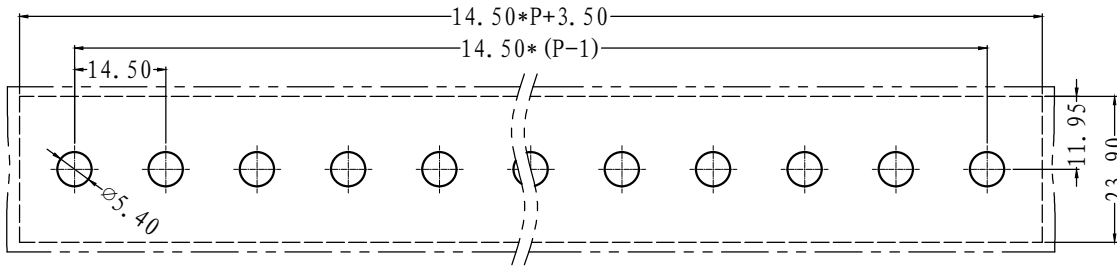
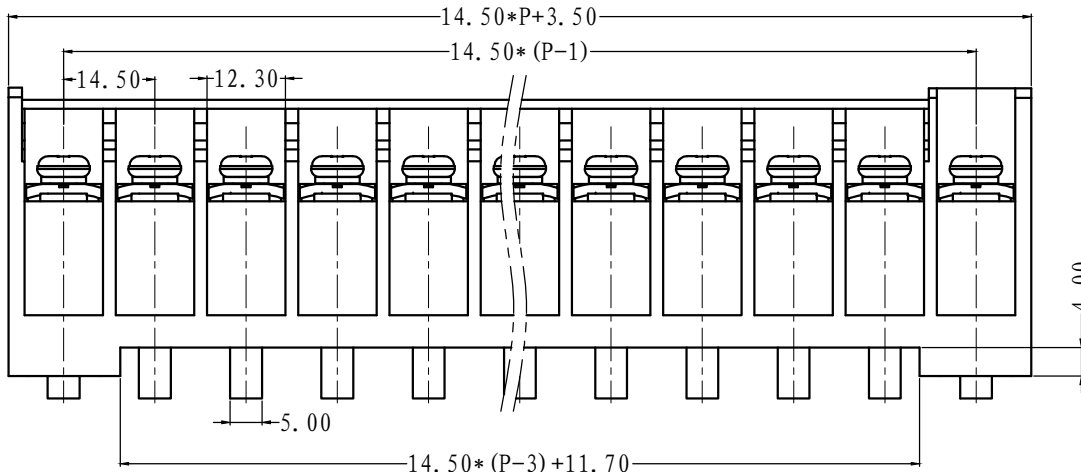


| REVISION RECORD | | | |
|-----------------|---------|------|------|
| REV. | CONTENT | MOD. | DATE |
| △ | 初版发行 | | |

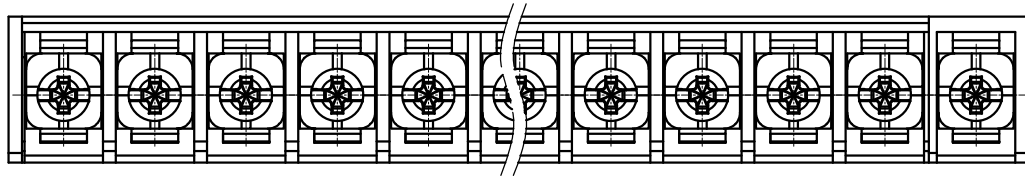

NOTES:
 Pitch : 14.5mm
 Rated Voltage : 600V
 Rated Current : 40 A
 Withstand Voltage :
 AC3000V for 1 minute
 Insulation Resistance :
 1000MΩ / DC1000V
 Using Temperature Range :
 - 40℃ ~ + 130℃
 Screw Torque Value : 2.0Nm

技术要求:
 间距: 14.5mm
 额定电压: 600V
 额定电流: 40A
 耐电压值: AC3000V/min
 绝缘阻抗: 1000MΩ/DC1000V
 使用条件: -40℃~+130℃
 螺丝扭矩: 2.0Nm

| | pitch dimension | | | Nominal dimension | | | | | — □ ○ |
|----------------|----------------------|-----------------------|------------------------|-----------------------|------------------------|-------------------------|--------------------------|-------------|-------------|
| | over 0 to 6 | over 6 to 10 | over 10 to 24 | over 0 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 150 | over 150 | |
| variable range | | | | | | | | | |
| Tolerance | ±0.1 | ±0.15 | ±0.25 | ±0.2 | ±0.3 | ±0.5 | ±0.7 | ±1.0 | 0.05/10 |

| | | | | | |
|--|----------------------|---------------|----------|------------------------|--|
| 4 | 外六角螺母 | SM00A500001V | 1 | 铁 | 镀锌 |
| 3 | GB1450-螺丝 | SPFFA808093V | P | 碳钢 | 镀锌 |
| 2 | GB1450-焊脚 | 2526B0001AV | P | 黄铜 | 镀雾锡 |
| 1 | GB1450/1-14.5-XXP-主体 | 2526A30XXAV-1 | 1 | PBT | 黑色 |
| NO. | NAME OF PART | NO. OF PART | Q' TY | MATERIAL | NOTES |
| DES. | WL | DATE | 18-09-28 | UNITS | MM |
| CHK. | DATE | SIZE | A4 | THIRD ANGLE PROJECTION | |
| APP. | DATE | SCALE | 1:1 | DWG NO. | SP-1-DB14501 |
| 上海有乐电气有限公司 Shanghai YouLe Electric Co., LTD | | | | TITLE | GB1450/1-14.5-XXP-1Y-00A GB1450/1-14.5-成品 |
| | | | | SHEET | 1 of 1 |
| | | | | REV: V0 | |