
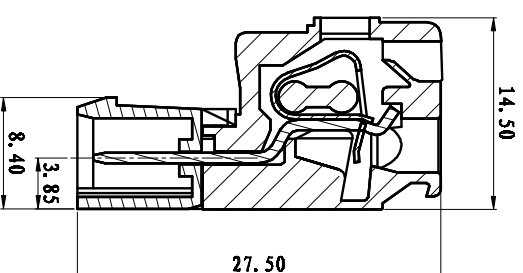
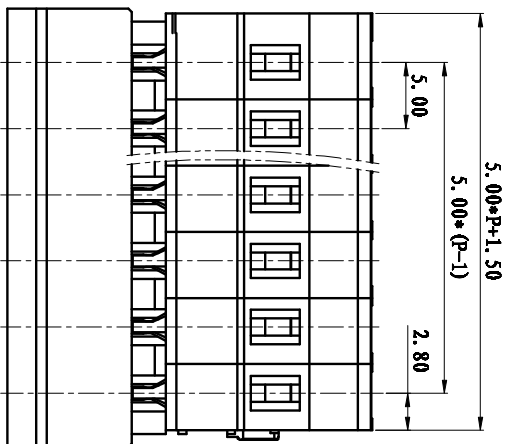


REVISION RECORD		
REV.	CONTENT	MOD. DATE
①	初版发行	

**技术要求:**

间距: 5.0mm  
 额定电压: 300V  
 额定电流: 15A  
 耐受电压: AC2500V/min  
 绝缘阻抗: 500MQ/DC500V  
 使用条件: -40℃~+105℃  
 适用线规: 22~14AWG

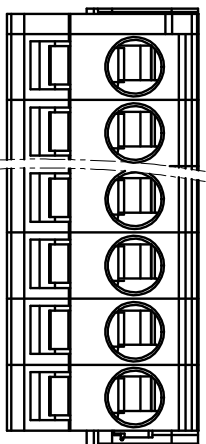

	pitch dimension			Nominal dimension			Tolerance
	over	over	over	over	over	over	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	150
	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±1.0

5	LSC10-方针	1062B0001AY	P	黄铜	镀雾锡
4	LSC1-薄片	F2A0D1S1C1BY	P	不锈钢	
3	LSZ10-5-0-主体	1070A0VXXAY	1	PA66	
2	LSC10-5-0B-盖板	1062C0Y01AY	1	PA66	
1	LSC10-5-0-本体	1069A0Y01AY	P	PA66	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	LDD	DATE	2012/08/15	mm	THIRD ANGLE PROJECTION
CHK.		DATE		A4	SHEET
APP.		SCALE	1:1	DWG NO.	1 of 1
				SR-2-1070002	REV: V0
				LSZ10-5-0-XP-1Y-00A	
				LSZ10-5-0-成品	

上海有乐电气有限公司  
 Shanghai Youle Electric CO.,LTD