


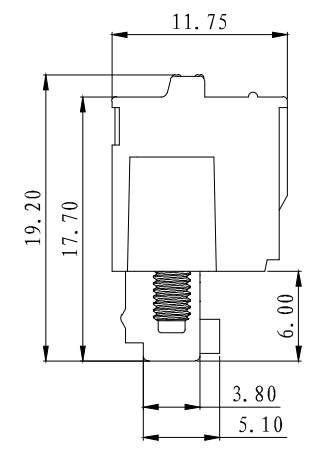


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

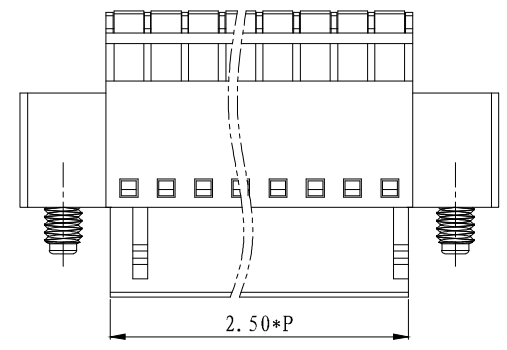


2P

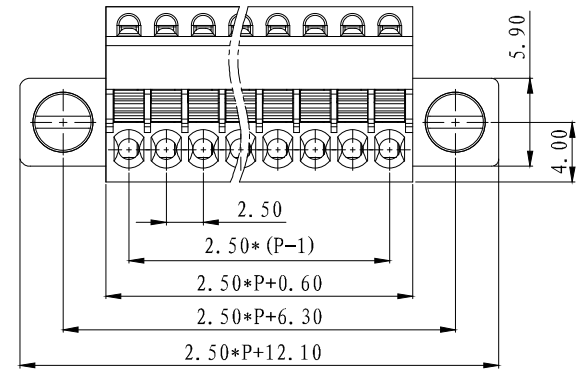

NOTES:  
 Pitch : 2.5mm  
 Rated Voltage : 150 V  
 Rated Current : 4A  
 Withstand Voltage :  
 AC2000V for 1 minute  
 Insulation Resistance :  
 500MΩ / DC500V  
 Using Temperature Range :  
 -40℃ ~ +105℃  
 Wire range :24 ~20 AWG

技术要求:  
 间距: 2.5mm  
 额定电压: 150V  
 额定电流: 4A  
 耐电压值: AC2000V/min  
 绝缘阻抗: 500MΩ/DC500V  
 使用条件: -40℃~+105℃  
 适用线规: 24~20 AWG



3P

	pitch dimension			Nominal dimension					— ▭ —
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	▭ —
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LC1-耳朵螺丝	SPOYA255101V	2	碳钢	三价铬钝化彩锌
5	LC6-2.5-弹片	F2A0DLC625BV	P	不锈钢	
4	LC6-2.5-夹子	1023B0001AV	P	黄铜	镀镍
3	LC6-2.5-按钮	1023D0YXXAV	P	POM	
2	LC6-2.5-盖板	1023C0YXXAV	1	PA66	
1	LC6M-2.5-主体	1023M0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	WY	DATE	23-08-12	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-1023001
				REV:	V0
上海有乐电气有限公司 Shanghai YouLe Electric CO., LTD				TITLE	LC6M-2.5-XXP-1Y-00A LC6M-2.5-成品